


INDEX TO SHEETS	DESCRIPTION
SHEET NO.	TITLE SHEET
1	DIVISION MAP
2	TYPICAL CROSS SECS
3	E.S.T. & QUANTITY SH.
4	B.W.-1

# STATE HIGHWAY DEPARTMENT OF TEXAS PLANS OF COMPLETED IMPROVEMENTS STATE PROJECT

## JEFFERSON CO.-HIGHWAY NO. U.S. 59


FROM PORT ARTHUR N.W. 1.2 MILES  
WIDENING PRESENT 20' CONC. PAVEMENT 7' ON EACH SIDE  
TO PROVIDE 34' CONC. PAVEMENT  
NET LENGTH OF PROJECT 6.3617 MI. = 1.004 MILES

DATE	REVISION
01/12/38	1
01/30/38	2

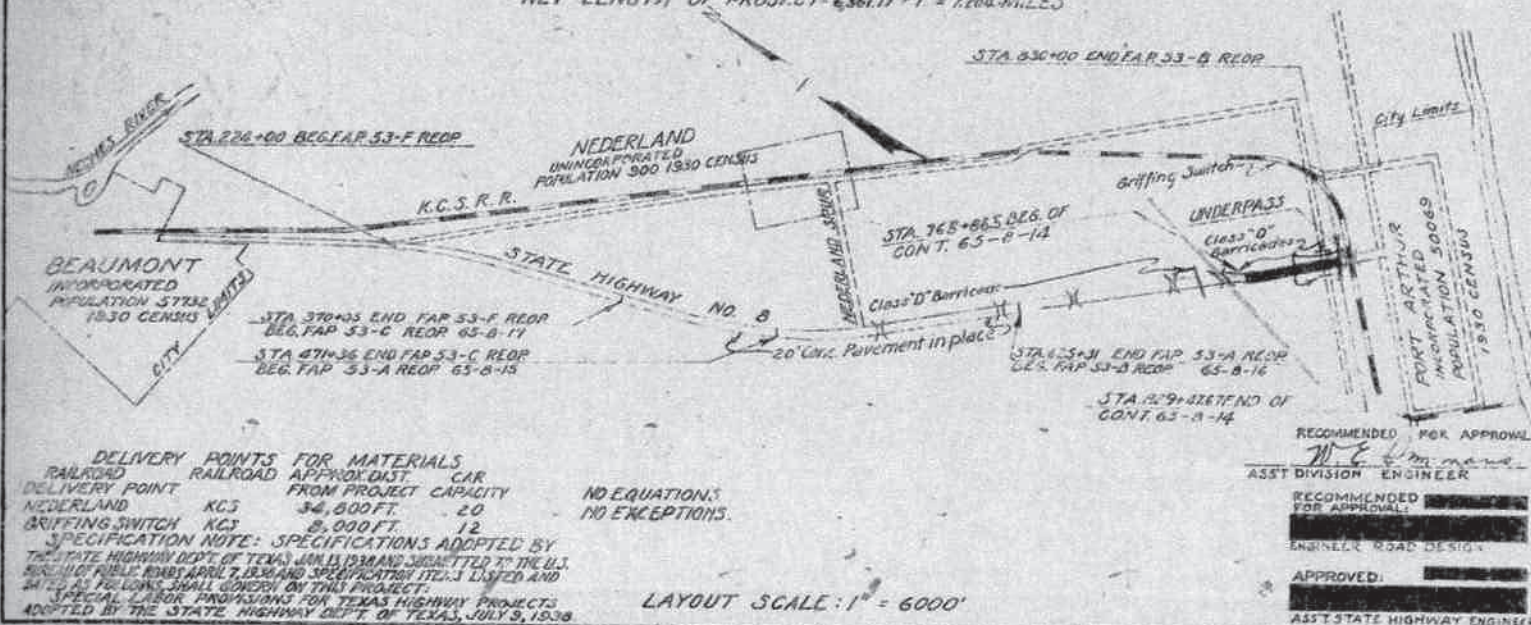

LAYOUT SCALE: 1" = 600'

RECOMMENDED FOR APPROVAL:  
ASST. DIVISION ENGINEER  
ENGINEER ROAD DESIGN  
APPROVED:  
ASST. STATE HIGHWAY ENGINEER

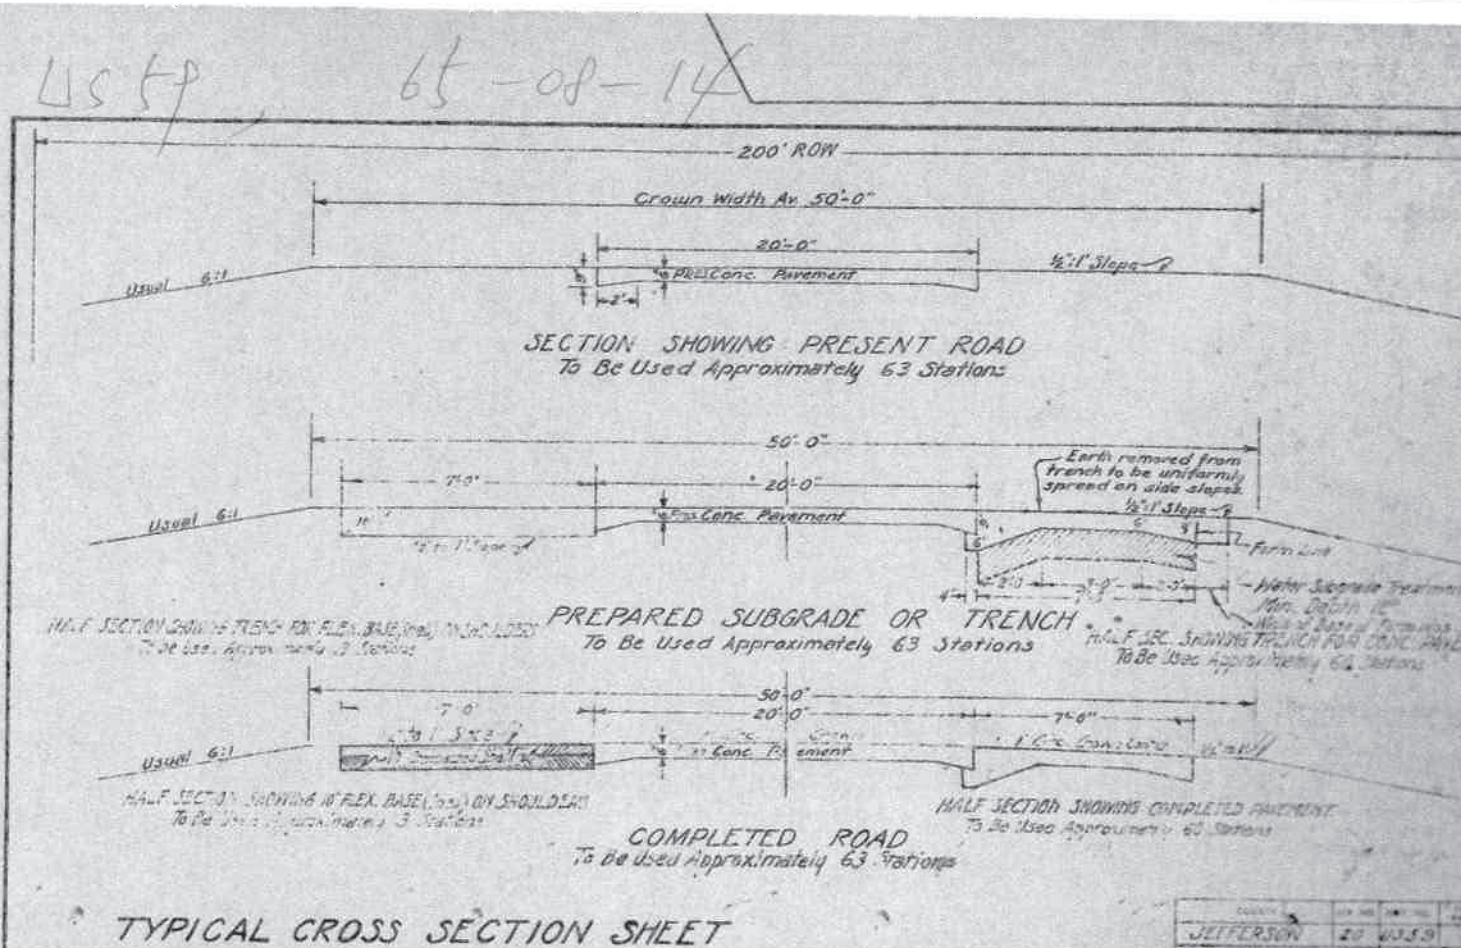

## TYPICAL CROSS SECTION SHEET

COUNTY	SECTION	DATE
JEFFERSON	20 U.S. 59	01/30/38


## ESTIMATE SUMMARY

CODE (12-8)	ITEM	DESCRIPTION	QUANTITIES	UNIT OF MEASURE
			ESTIMATED FINAL	DESC. UNIT (15)
270	101	COM. ROAD EXCAVATION	2413	CU. Yd. 17
475	202	SPRINKLING	5	1000 GAL. 26
470	203 B & Sp	ROLLING	5	1000 LBS. 19
445	207	SALV. & REPLAC. FLEX. BASE (SHOUL)	100	CU. Yd. 17
530	209	WATER SUBGRADE TREATMENT	54	1000 GAL. 26
400	320 B & Sp	CONCRETE PAVEMENT	3410	SQ. Yd. 16
495	324	WEINF. STEEL FOR PAVEMENTS	35,319	LBS. 13

## ESTIMATE AND QUANTITY SHEET

COUNTY	SECTION	DATE
JEFFERSON	20 U.S. 59	01/30/38

It is hereby provided that the usual 20% variation clause in the Specification Item 4.3 is amended to permit a 50% variation for Water Subgrade Treatment. Sprinkling & Rolling. 350 Cotton Bales for curing Concrete Pavement are stored in the Division Warehouse at the State Highway Department in Beaumont, Texas, and will be delivered to the Contractor at that point. Traffic Stripes 6" in width and 1/2" from the outer edges of the completed pavement will be painted by the Maintenance Forces after completion of the project. Hand finishing will be permitted at the option of the Contractor.

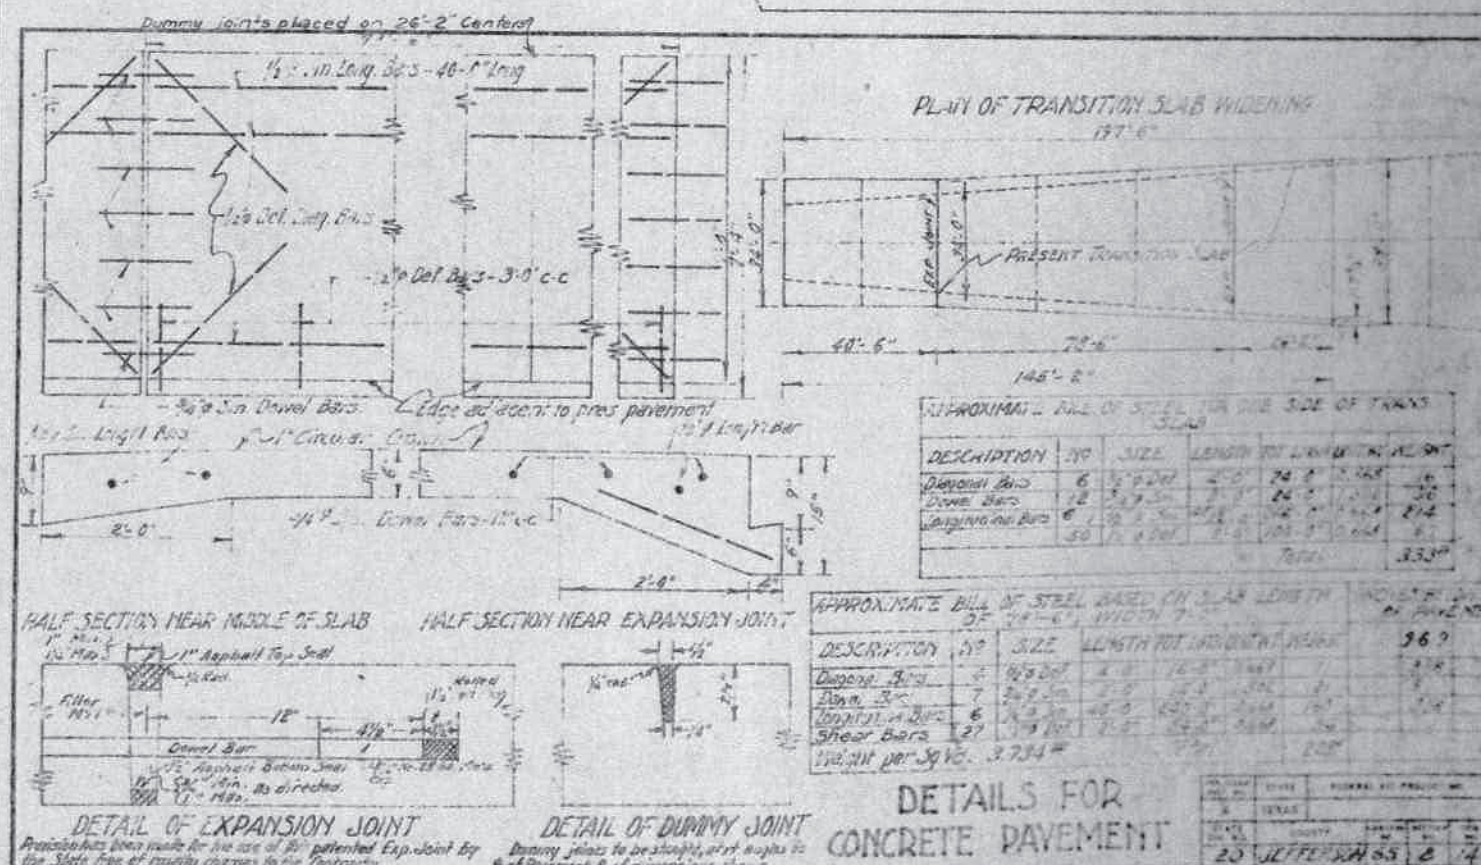

## DETAILS FOR CONCRETE PAVEMENT

COUNTY	SECTION	DATE
JEFFERSON	20 U.S. 59	01/30/38